


A slip ring can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure.

A slip ring is also called a rotary electrical interface, collector, swivel or a commutation.

A slip ring can improve system performance by simplifying operations and eliminating damage-prone wires dangling from movable joints.



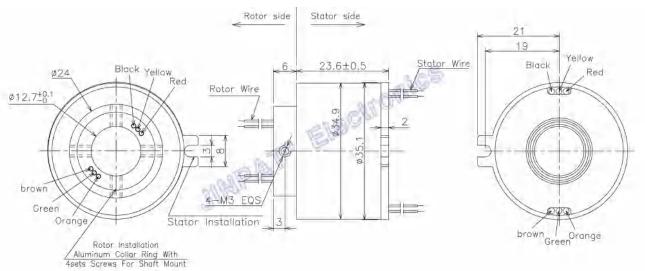

Electronic & Electric			Mechanical	
Circuits	To <i>tal</i>	6CKT	Working Speed	0~2000rpm
	Detail	6X2A	Contact Material	Gold-Gold
Rating Voltage		240VAC	Housing Material	Engineering plastic
Dielectric Strength		500VAC@50Hz	Lead Wire Length	Stator:300mm Rotor:300mm
Insulation Resistance		≥300MΩ@500VDC	Inner Diameter	φ12.7mm
Environment			Remarks	
Working T emperature		-20°C~+60°C	· IP	IP50
Working Humidity		≤60%RH		