


A slip ring can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure. A slip ring is also called a rotary electrical interface, collector, swivel or a commutation. A slip ring can improve system performance by simplifying operations and eliminating damage-prone wires dangling from movable joints.

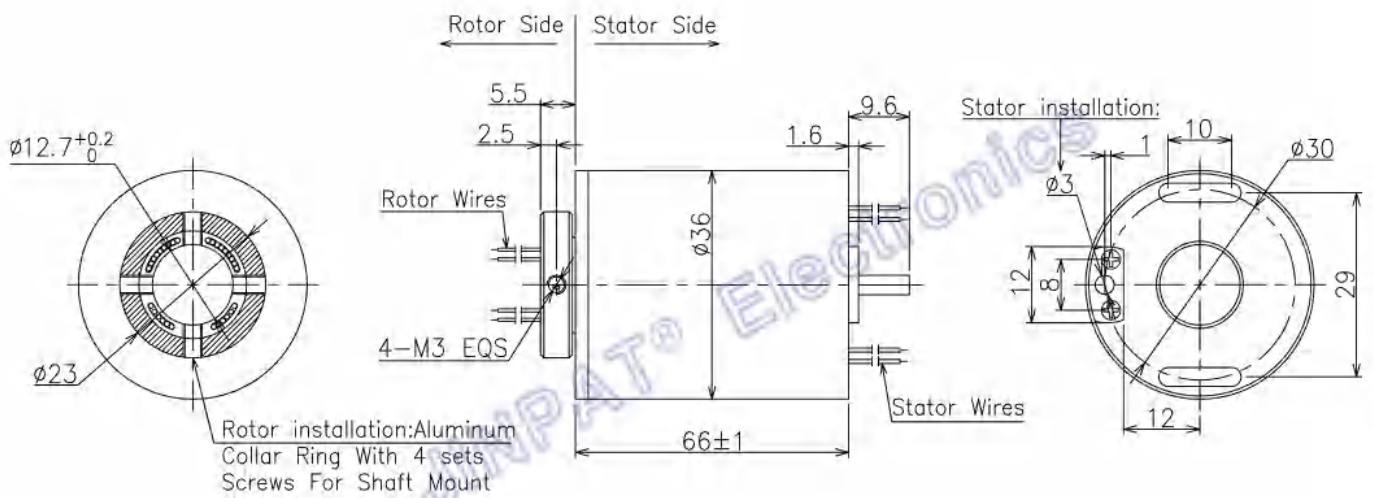

Electronic & Electric			Mechanical	
Circuits	Total	30CKT	Working Speed	0~300rpm
	Detail	30x2A	Contact Material	Precious Metal
Rating Voltage		240VAC/DC	Housing Material	Gold to Gold
Dielectric Strength		500VAC@50Hz(P)	Lead Wire Length	Stator:400mm Rotor:400mm
Insulation Resistance		≥500MΩ@500VDC	Inner Diameter	φ12.7mm
Environment			Remarks	
Working Temperature		-20°C~+60°C	IP	IP44 (Horizontal installation)
Working Humidity		≤60%RH		