


Description

A slip ring can be used in any electromechanical system that requires unrestrained, continuous rotation while transferring power or data from a stationary to a rotating structure. A slip ring is also called a rotary electrical interface, collector, swivel or a commutator. A slip ring can improve system performance by simplifying operations and eliminating damage-prone wires dangling from movable joints.



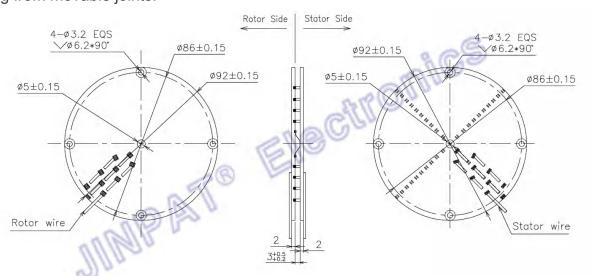

Electronic & Electric			Mechanical	
Circuits	To <i>tal</i>	8CKT	Working Speed	0~100rpm
	Detail	8x5A	Contact Material	Precious Metal
Rating Voltage		240V	Housing Material	FR-4
Dielectric Strength		300VAC@50Hz	Lead Wire Length	Stator:300mm Rotor:300mm
Insulation Resistance		≥300MΩ@300VDC	Inner Diameter	φ5.0mm
Environment			Remarks	
Worki empe	•	-20°C~+60°C	Application	/
Working Humidity		≤60%RH	Other	/
IP		1	Note: "P" stands for power, "S" stands for signal.	