



### Features:

- Pin contact instead of wire contact
- Transmit power and signal
- Smooth function
- Low contact resistance
- Easy to install

### Option:

- Rotating speed
- Number of circuits
- Current capacity
- Housing material

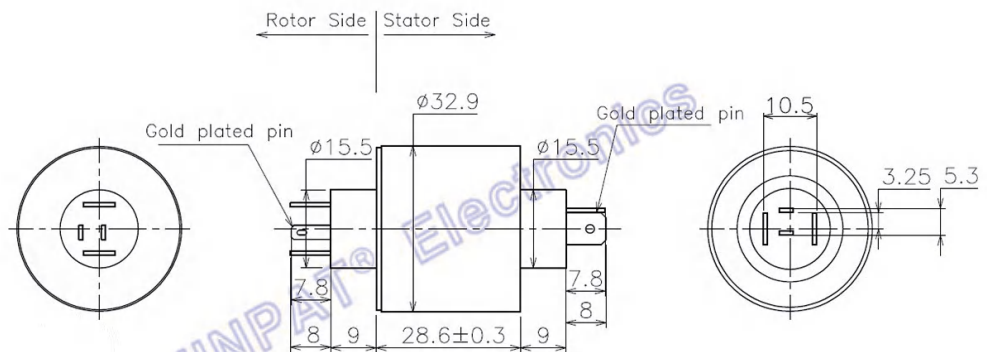

Electronic & Electric			Mechanical	
Circuits	Total	4CKT	Working Speed	0~300rpm
	Detail	2x5A / 2x15A	Contact Material	Gold to Gold
Rating Voltage		0~240V AC/DC	Housing Material	Engineering plastics
Dielectric Strength		500VAC@50Hz	Lead Wire Length	Gold plated pin (8mm)
Insulation Resistance		500MΩ@500VDC	Dynamic Resistance Fluctuation Value	≤35MΩ
Environment			Remarks	
Working Temperature		-40°C~+80°C	Application	/
Working Humidity		≤60%RH	Other	/
IP		IP40	Note: "P" stands for power, "S" stands for signal.	