


High Frequency Phase-stable Low Loss Coaxial Cable Series,  
High Frequency Cable Auxiliaries  
and High Frequency Test Cable Auxiliaries are broadly  
applied in aerospace industry,  
Electronic countermeasures system(ECM),  
high frequency anechoic system connection and 5G mobile  
communication, etc..

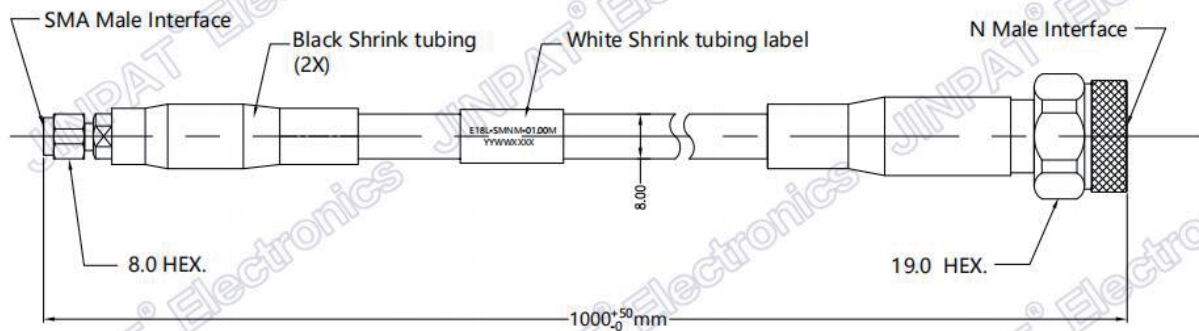

### Product specification

Interface Type	N-F/N-M(50Ω)	Body Materials	Stainless steel/Brass /Be-Cu/PTFE
Frequency range	DC-18GHz	Plating	Passivation/Gold
VSWR,Max	1.3	Durability	>500cycles
Insertion loss,Max	1.32dB	Temperature range	-40~+85°C
Voltage rating	335V(rms)	RoHS2002/95/EC	compliant
Dielectric withstanding voltage	500V	Cable retention force	>100lbs
Insulation resistance	5000MΩ	Min.bending radius repeated	80mm