


The LPP rotary unions can perform rotation of 360 degrees. The medium includes inert gas such as compressed air, steam, vacuum, nitrogen, hydrogen, etc. It can integrate slip ring to transport various control signals. The sealing surface and sealing ring are made of special materials, with the advantages of wear resistance, long life, corrosion resistance, and no leakage. Customers can install LPP rotary unions independently according to the application environment.

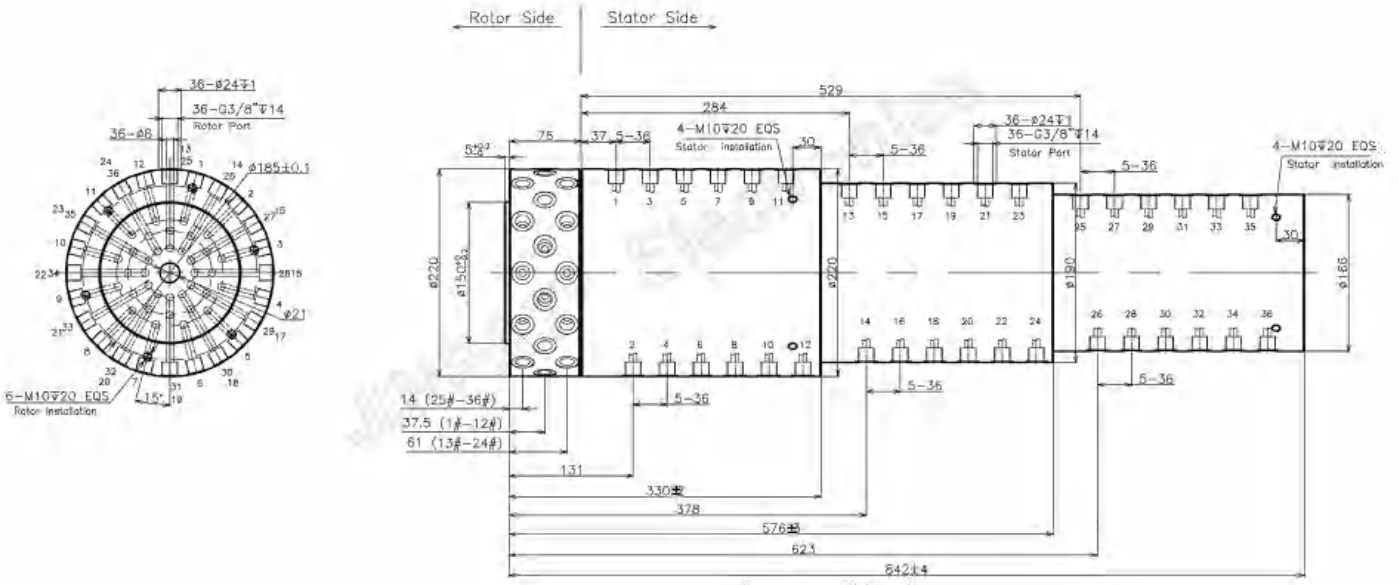

Pneumatic rotary joint	
Max.Operating Pressure	0~1Mpa
Compression medium	Air
Channel number	36 channel
Working Speed	0~10rpm
Windpope diameter	φ10mm
No-load torque	≤30 N.m
Inner Diameter	φ21mm
Connecting calibre	G3/8"
Housing Material	Aluminum Alloy