


High Frequency Phase-stable Low Loss Coaxial Cable Series, High Frequency Cable Auxiliaries and High Frequency Test Cable Auxiliaries are broadly applied in aerospace industry, Electronic countermeasures system(ECM), high frequency anechoic system connection and 5G mobile communication, etc..

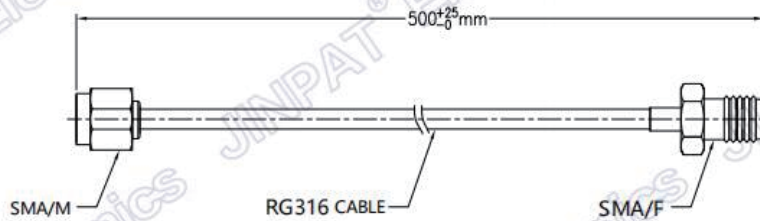

Product specification

Interface Type	SMA-M(50Ω)	Body Materials	Brass/PTFE
Frequency range	DC-3GHz	Plating	Gold
VSWR,Max	1.35	Durability	>500cycles
Insertion loss,Max	1.8dB	Temperature range	-40~+85°C
Voltage rating	335V(rms)	RoHS2002/95/EC	RoHS compliant
Dielectric withstanding voltage	500V	Cable retention force	>60lbs(SMA)
Insulation resistance	5000MΩ	Min.bending radius repeated	110mm