
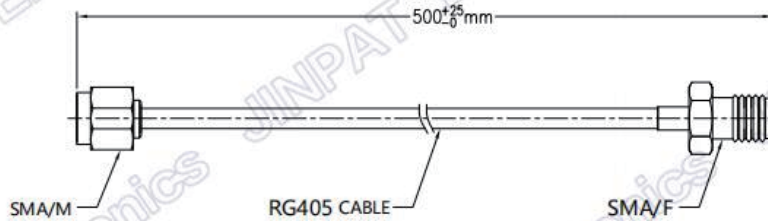


High Frequency Phase-stable Low Loss Coaxial Cable Series,  
High Frequency Cable Auxiliaries  
and High Frequency Test Cable Auxiliaries are broadly  
applied in aerospace industry,  
Electronic countermeasures system(ECM),  
high frequency anechoic system connection and 5G mobile  
communication, etc..

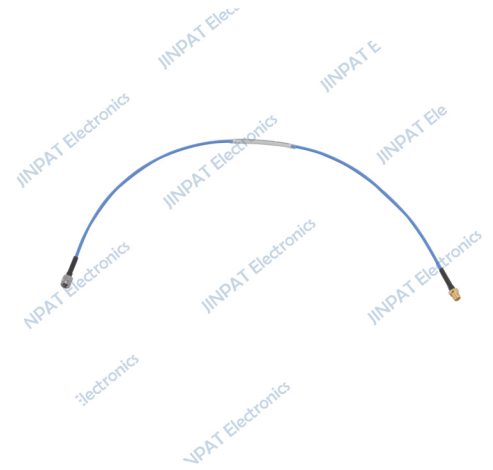

### Product specification

Product specification			
Interface Type	SMA-M/SMA-F(50Ω)	Body Materials	Brass/PTFE
Frequency range	DC-6GHz	Plating	Gold/NICKEL
VSWR,Max	1.35	Durability	>500cycles
Insertion loss,Max	1.3dB	Temperature range	-40~+85°C
Voltage rating	335V(rms)	RoHS2002/95/EC	RoHS compliant
Dielectric withstanding voltage	500V	Cable retention force	>60lbs (SMA)
Insulation resistance	5000MΩ	Min.bending radius repeated	27mm