


The LPP rotary unions can perform rotation of 360 degrees. The medium includes inert gas such as compressed air, steam, vacuum, nitrogen, hydrogen, etc. It can integrate slip ring to transport various control signals. The sealing surface and sealing ring are made of special materials, with the advantages of wear resistance, long life, corrosion resistance, and no leakage. Customers can install LPP rotary unions independently according to the application environment.

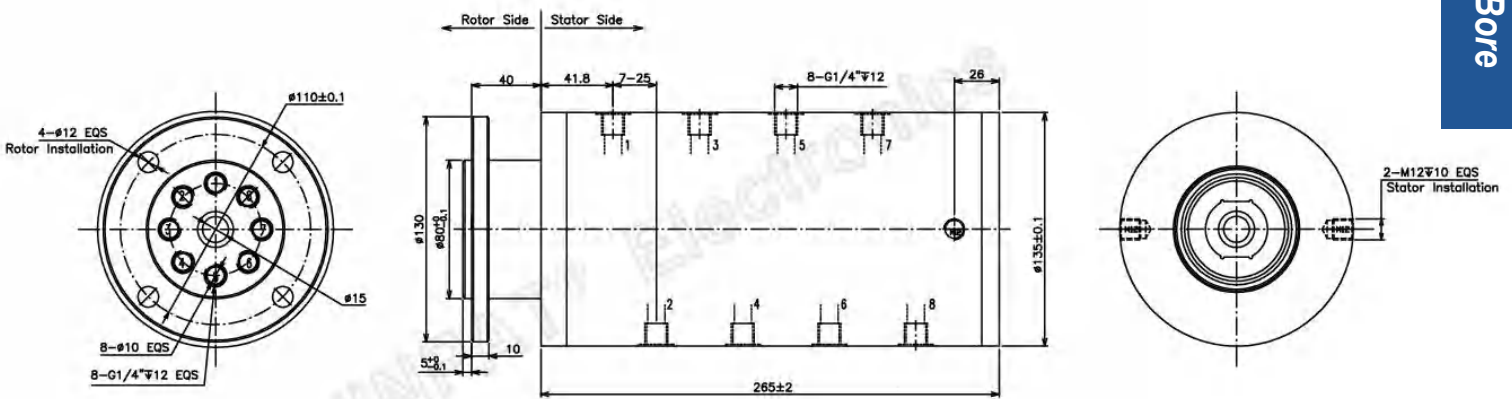

Pneumatic rotary joint

Max.Operating Pressure	0~1Mpa
Compression medium	Air
Channel number	8 channel
Working Speed	0~100rpm
Windpope diameter	$\phi 10\text{mm}$
No-load torque	$\leq 12 \text{ N.m}$
Inner Diameter	$\phi 15\text{mm}$
Connecting calibre	G1/4"
Housing Material	Aluminum Alloy